

S30 Series

Stainless Steel Top Plate

Capacity to 325 pounds each

Polished grade 304 stainless steel designed to prevent rust and corrosion in the most demanding wet, damp and corrosive environments. Stainless steel is impervious to repeated washings, thereby reducing maintenance and providing longer caster life. All component metal parts including ball bearings, axle, nut, spanner bushing and dust cap are stainless steel.

FEATURES

- ✓ **Finish:** Stainless steel
- ✓ **Dust Cap:** all swivel models feature dust cap which protects swivel raceway bearings and improves performance.
- ✓ **Swivel Construction:** stainless steel grade 440 ball bearings with hardened double raceway construction. Bearings are magnetic.
- ✓ **Axle:** 3/8" diameter stainless steel axle with lock nut.
- ✓ **King Pin:** 1/2" stainless steel rivet, hydraulically upset.
- ✓ **Grease Temperature Range:** -45°F to +260°F

CASTER OPTIONS

- ✓ **PosiLoc® Brake:** stainless steel construction; to order, add "PL" to end of model number. 
- ✓ **VertiLoc® Brake:** stainless steel construction; to order, add "VL" to end of model number. 
- ✓ **Swivel Lock:** Locks caster in trailing position at 180° while wheel spins freely. To order specify "1PSL". 
- ✓ **Swivel Grease Seal:** Includes zerk in the dust cap. To order, add "GS" to end of model number. 
- ✓ **Thread Guards:** See page 94 for thread guard availability.
- ✓ **Optional Top Plate Sizes:** variety of top plate sizes available – consult factory.



5-S31-121 PLT 2
(shown in photo)

5-S30-213GD PLT 2
(shown in photo)

MOUNTING OPTIONS

Top Plate Sizes (swivel & rigid): to order, add Plate Mounting Code to end of model number (Example: 5-S30-314G **PLT 2**).

Mounting Code	Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
PLT 2	2-3/8" x 3-5/8"	1-3/4" x 3"	5/16"
PLT 3	3-1/8" x 4-1/8"	2-3/8" x 3-7/16"	5/16"
PLT 5	3-3/4" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Caster Model Number	Rigid Caster Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)				
4	1 1/4	ADVANTAGE TPR / ROUND	DELRIN	250	4-S30-314GD	4-S31-314GD	2-1/4	5 1/16	3 1/2				
		ADVANTAGE TPR / FLAT	DELRIN	300	4-S30-314GF	4-S31-314GF	2-1/4						
		POLYOLEFIN	SS SLEEVE	300	4-S30-513	4-S31-513	2-1/4						
		POLYLOC / GREY	DELRIN	300	4-S30-314G	4-S31-314G	2-1/4						
		ADVANTAGE HEAT FLAT ¹	SS BALL	300	4-S30-213RTF	4-S31-213RTF	2-1/4						
		ADVANTAGE HEALTH	SS BALL	300	4-S30-213MF	4-S31-213MF	2-1/4						
	1 1/2	PHENOLIC	SS SLEEVE	300	4-S30-121	4-S31-121	2-1/4						
		HI-TEMP RESIN	PLAIN	300	4-S30-521HT	4-S31-121HT	2-1/4						
		5	1 1/4	ADVANTAGE TPR / ROUND ²	SS BALL	250	5-S30-213GD			5-S31-213GD	2-3/4	6 1/8	4
				POLYOLEFIN	SS SLEEVE	300	5-S30-513			5-S31-513	2-3/4		
WELDED DISC / POLYURETHANE	SS SLEEVE			300	5-S30-113P	5-S31-113P	2-3/4						
POLYLOC / GREY ²	SS BALL			300	5-S30-213G	5-S31-213G	2-3/4						
ADVANTAGE HEAT FLAT ¹	SS BALL			300	5-S30-213RTF	5-S31-213RTF	2-3/4						
ADVANTAGE HEALTH	SS BALL			300	5-S30-213MF	5-S31-213MF	2-3/4						
1 1/2	ADVANTAGE TPR / FLAT		DELRIN	325	5-S30-213GF	5-S31-213GF	2-3/4						
	PHENOLIC		SS SLEEVE	300	5-S30-121	5-S31-121	2-3/4						
6	1 1/4	HI-TEMP RESIN	PLAIN	325	5-S30-521NHT	5-S31-NHT	2-3/4	7 3/16	4 1/2				
		ADVANTAGE TPR / ROUND	DELRIN	300	6-S30-314GD	6-S31-314GD	3-1/4						
		POLYOLEFIN	SS SLEEVE	300	6-S30-521	6-S31-521	3-1/4						
		POLYLOC / GREY ¹	SS BALL	300	6-S30-213G	6-S31-213G	3-1/4						
		ADVANTAGE HEAT FLAT	SS BALL	325	6-S30-213RTF	6-S31-213RTF	3-1/4						
		ADVANTAGE HEALTH	SS BALL	325	6-S30-213MF	6-S31-213MF	3-1/4						
	1 1/2	PHENOLIC	SS SLEEVE	300	6-S30-121	6-S31-121	3-1/4						

¹Delrin bearing also available, consult factory. ²Advantage Heat round treads also available, change RTR to RTF.

S30 STAINLESS SERIES



S32 Series

Stainless Steel Round Stem


Capacity to 325 pounds each

Polished grade 304 stainless steel designed to prevent rust and corrosion in the most demanding wet, damp and corrosive environments. Stainless steel is impervious to repeated washings, thereby reducing maintenance and providing longer caster life. All component metal parts including top plate or stems ball bearings, axle, nut, spanner bushing and dust cap are stainless steel.

FEATURES

- ✓ **Finish:** Stainless steel
- ✓ **Dust Cap:** all swivel models feature dust cap which protects swivel raceway bearings and improves performance.
- ✓ **Swivel Construction:** stainless steel grade 440 ball bearings with hardened double raceway construction. Bearings are magnetic.
- ✓ **Axle:** 3/8" diameter stainless steel axle with lock nut.
- ✓ **King Pin:** 1/2" stainless steel rivet, hydraulically upset.
- ✓ **Grease Temperature Range:** -45°F to +260°F

CASTER OPTIONS


- ✓ **PosiLoc® Brake:** stainless steel construction; to order, add "PL" to end of model number. 
- ✓ **VertiLoc® Brake:** stainless steel construction; to order, add "VL" to end of model number. 
- ✓ **Swivel Grease Seal:** Includes zerk in the dust cap. To order, add "GS" to end of model number. 
- ✓ **Thread Guards:** See page 94 for thread guard availability.



5-S32-113P
(shown in photo)

MOUNTING

Standard Round Stem Size:
3/4" diameter x 2" long with three drilled holes 1/4" diameter.

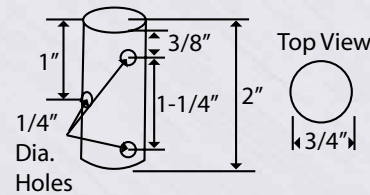

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Round Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)				
4	1 1/4	ADVANTAGE TPR / ROUND	DELIRIN	250	4-S32-314GD	2-1/4	4 15/16	3 1/2				
		ADVANTAGE TPR / FLAT	DELIRIN	300	4-S32-314GF	2-1/4						
		POLYOLEFIN	SS SLEEVE	300	4-S32-513	2-1/4						
		POLYLOC / GREY	DELIRIN	300	4-S32-314G	2-1/4						
		ADVANTAGE HEAT FLAT ¹	SS BALL	300	4-S32-213RTF	2-1/4						
		ADVANTAGE HEALTH	SS BALL	300	4-S32-213MF	2-1/4						
	1 1/2	PHENOLIC	SS SLEEVE	300	4-S32-121	2-1/4						
		HI-TEMP RESIN	PLAIN	300	4-S32-521HT	2-1/4						
		5	1 1/4	ADVANTAGE TPR / ROUND ²	SS BALL	250			5-S32-213GD	2-3/4	6	4
				POLYOLEFIN	SS SLEEVE	300			5-S32-513	2-3/4		
WELDED DISC / POLYURETHANE	SS SLEEVE			300	5-S32-113P	2-3/4						
POLYLOC / GREY ²	SS BALL			300	5-S32-213G	2-3/4						
ADVANTAGE HEAT FLAT ¹	SS BALL			300	5-S32-213RTF	2-3/4						
ADVANTAGE HEALTH	SS BALL			300	5-S32-213MF	2-3/4						
ADVANTAGE TPR / FLAT	DELIRIN		325	5-S32-314GF	2-3/4							
1 1/2	PHENOLIC	SS SLEEVE	300	5-S32-121	2-3/4							
	HI-TEMP RESIN	PLAIN	325	5-S32-521NHT	2-3/4							
6	1 1/4	ADVANTAGE TPR / ROUND	DELIRIN	300	6-S32-314GD	3-1/4	7 1/16	4 1/2				
		POLYOLEFIN	SS SLEEVE	300	6-S32-521	3-1/4						
		POLYLOC / GREY ¹	SS BALL	300	6-S32-213G	3-1/4						
		ADVANTAGE HEAT FLAT	SS BALL	325	6-S32-213RTF	3-1/4						
		ADVANTAGE HEALTH	SS BALL	325	6-S32-213MF	3-1/4						
	1 1/2	PHENOLIC	SS SLEEVE	300	6-S32-121	3-1/4						

¹Delrin bearing also available, consult factory. ²Advantage Heat Round treads also available, change RTR to RTF.



S32 STAINLESS SERIES

S34 Series

Stainless Steel Spring Ring Stem

Capacity to 325 pounds each

Polished grade 304 stainless steel designed to prevent rust and corrosion in the most demanding wet, damp and corrosive environments. Stainless steel is impervious to repeated washings, thereby reducing maintenance and providing longer caster life. All component metal parts including ball bearings, axle, nut, spanner bushing and dust cap are stainless steel.

FEATURES

- ✓ **Finish:** Stainless steel
- ✓ **Dust Cap:** all swivel models feature dust cap which protects swivel raceway bearings and improves performance.
- ✓ **Swivel Construction:** stainless steel grade 440 ball bearings with hardened double raceway construction. Bearings are magnetic.
- ✓ **Axle:** 3/8" diameter stainless steel axle with lock nut.
- ✓ **King Pin:** 1/2" stainless steel rivet, hydraulically upset.
- ✓ **Grease Temperature Range:** -45°F to +260°F

CASTER OPTIONS

- ✓ **PosiLoc® Brake:** stainless steel construction; to order, add "PL" to end of model number. 
- ✓ **VertiLoc® Brake:** stainless steel construction; to order, add "VL" to end of model number. 
- ✓ **Swivel Grease Seal:** Includes zerk in the dust cap. To order, add "GS" to end of model number. 
- ✓ **Thread Guards:** See page 94 for thread guard availability.
- ✓ **Optional Stem Sizes:** variety of stem sizes available – consult factory



5-S34-214G
(shown in photo)

MOUNTING

Standard Spring Ring Stem Size: .845" diameter x 2-3/16" long

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Spring Ring Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)				
4	1 1/4	ADVANTAGE TPR / ROUND	DELRIN	250	4-S34-314GD	2-1/4	4 15/16	3 1/2				
		ADVANTAGE TPR / FLAT	DELRIN	300	4-S34-314GF	2-1/4						
		POLYOLEFIN	SS SLEEVE	300	4-S34-513	2-1/4						
		POLYLOC / GREY	DELRIN	300	4-S34-314G	2-1/4						
		ADVANTAGE HEAT FLAT ¹	SS BALL	300	4-S34-213RTF	2-1/4						
		ADVANTAGE HEALTH	SS BALL	300	4-S34-213MF	2-1/4						
	1 1/2	PHENOLIC	SS SLEEVE	300	4-S34-121	2-1/4						
		HI-TEMP RESIN	PLAIN	300	4-S34-521HT	2-1/4						
		5	1 1/4	ADVANTAGE TPR / ROUND ²	SS BALL	250			5-S34-213GD	2-3/4	6	4
				POLYOLEFIN	SS SLEEVE	300			5-S34-513	2-3/4		
WELDED DISC / POLYURETHANE	SS SLEEVE			300	5-S34-113P	2-3/4						
POLYLOC / GREY ²	SS BALL			300	5-S34-213G	2-3/4						
ADVANTAGE HEAT FLAT ¹	SS BALL			300	5-S34-213RTF	2-3/4						
ADVANTAGE HEALTH	SS BALL			300	5-S34-213MF	2-3/4						
ADVANTAGE TPR / FLAT	DELRIN		325	5-S34-314GF	2-3/4							
1 1/2	PHENOLIC		SS SLEEVE	300	5-S34-121	2-3/4						
	HI-TEMP RESIN	PLAIN	325	5-S34-521NHT	2-3/4							
6	1 1/4	ADVANTAGE TPR / ROUND	DELRIN	300	6-S34-314GD	3-1/4	7 1/16	4 1/2				
		POLYOLEFIN	SS SLEEVE	300	6-S34-521	3-1/4						
		POLYLOC / GREY ¹	SS BALL	300	6-S34-213G	3-1/4						
		ADVANTAGE HEAT FLAT	SS BALL	325	6-S34-213RTF	3-1/4						
		ADVANTAGE HEALTH	SS BALL	325	6-S34-213MF	3-1/4						
	1 1/2	PHENOLIC	SS SLEEVE	300	6-S34-121	3-1/4						

¹Delrin bearing also available, consult factory. ²Advantage Heat Round treads also available, change RTR to RTF.



S36 Series

Stainless Steel Threaded Stem

Capacity to 325 pounds each

Polished grade 304 stainless steel designed to prevent rust and corrosion in the most demanding wet, damp and corrosive environments. Stainless steel is impervious to repeated washings, thereby reducing maintenance and providing longer caster life. All component metal parts including ball bearings, axle, nut, spanner bushing and dust cap are stainless steel.

FEATURES

- ✓ **Finish:** Stainless steel
- ✓ **Dust Cap:** all swivel models feature dust cap which protects swivel raceway bearings and improves performance.
- ✓ **Swivel Construction:** stainless steel grade 440 ball bearings with hardened double raceway construction. Bearings are magnetic.
- ✓ **Axle:** 3/8" diameter stainless steel axle with lock nut.
- ✓ **King Pin:** 1/2" stainless steel rivet, hydraulically upset.
- ✓ **Grease Temperature Range:** -45°F to +260°F

CASTER OPTIONS

- ✓ **PosiLoc® Brake:** stainless steel construction; to order, add "PL" to end of model number. 
- ✓ **VertiLoc® Brake:** stainless steel construction; to order, add "VL" to end of model number. 
- ✓ **Swivel Grease Seal:** Includes zerk in the dust cap. To order, add "GS" to end of model number. 
- ✓ **Thread Guards:** See page 94 for thread guard availability.
- ✓ **Optional Stem Sizes:** variety of stem sizes available – consult factory



5-S36-513
(shown in photo)

MOUNTING

Standard Threaded Stem Size:
1/2" diameter – 13 x 1-1/2" long.

Other stems available. Consult factory.

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Threaded Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
4	1 1/4	ADVANTAGE TPR / ROUND	DELRIN	250	4-S36-314GD	2-1/4	4 15/16	3 1/2
		ADVANTAGE TPR / FLAT	DELRIN	300	4-S36-314GF	2-1/4		
		POLYOLEFIN	SS SLEEVE	300	4-S36-513	2-1/4		
		POLYLOC / GREY	DELRIN	300	4-S36-314G	2-1/4		
		ADVANTAGE HEAT FLAT ¹	SS BALL	300	4-S36-213RTF	2-1/4		
		ADVANTAGE HEALTH	SS BALL	300	4-S36-213MF	2-1/4		
	1 1/2	PHENOLIC	SS SLEEVE	300	4-S36-121	2-1/4		
		HI-TEMP RESIN	PLAIN	300	4-S36-521HT	2-1/4		
5	1 1/4	ADVANTAGE TPR / ROUND ²	SS BALL	250	5-S36-213GD	2-3/4	6	4
		POLYOLEFIN	SS SLEEVE	300	5-S36-513	2-3/4		
		WELDED DISC / POLYURETHANE	SS SLEEVE	300	5-S36-113P	2-3/4		
		POLYLOC / GREY ²	SS BALL	300	5-S36-213G	2-3/4		
		ADVANTAGE HEAT FLAT ¹	SS BALL	300	5-S36-213RTF	2-3/4		
		ADVANTAGE HEALTH	SS BALL	300	5-S36-213MF	2-3/4		
		ADVANTAGE TPR / FLAT	DELRIN	325	5-S36-314GF	2-3/4		
	1 1/2	PHENOLIC	SS SLEEVE	300	5-S36-121	2-3/4		
		HI-TEMP RESIN	PLAIN	325	5-S36-521NHT	2-3/4		
6	1 1/4	ADVANTAGE TPR / ROUND	DELRIN	300	6-S36-314GD	3-1/4	7 1/16	4 1/2
		POLYOLEFIN	SS SLEEVE	300	6-S36-521	3-1/4		
		POLYLOC / GREY ¹	SS BALL	300	6-S36-213G	3-1/4		
		ADVANTAGE HEAT FLAT	SS BALL	325	6-S36-213RTF	3-1/4		
		ADVANTAGE HEALTH	SS BALL	325	6-S36-213MF	3-1/4		
	1 1/2	PHENOLIC	SS SLEEVE	300	6-S36-121	3-1/4		

¹Delrin bearing also available, consult factory. ²Advantage Heat Round treads also available, change RTR to RTF.

S36 STAINLESS SERIES



S40 Series

Stainless Steel Expanding Adapter

Capacity to 325 pounds each

Polished grade 304 stainless steel designed to prevent rust and corrosion in the most demanding wet, damp and corrosive environments. Stainless steel is impervious to repeated washings, thereby reducing maintenance and providing longer caster life. All component metal parts including ball bearings, axle, nut, spanner bushing and dust cap are stainless steel.

FEATURES

- ✓ **Finish:** Stainless steel
- ✓ **Dust Cap:** all swivel models feature dust cap which protects swivel raceway bearings and improves performance.
- ✓ **Swivel Construction:** stainless steel grade 440 ball bearings with hardened double raceway construction. Bearings are magnetic.
- ✓ **Axle:** 3/8" diameter stainless steel axle with lock nut.
- ✓ **King Pin:** 1/2" stainless steel, hydraulically upset.
- ✓ **Grease Temperature Range:** -45°F to +260°F

CASTER OPTIONS

- ✓ **PosiLoc® Brake:** stainless steel construction; to order, add "PL" to end of model number. 
- ✓ **VertiLoc® Brake:** stainless steel construction; to order, add "VL" to end of model number. 
- ✓ **Swivel Grease Seal:** Includes zerk in the dust cap. To order, add "GS" to end of model number. 
- ✓ **Thread Guards:** See page 94 for thread guard availability.
- ✓ **Optional Stem Sizes:** variety of stem sizes available – consult factory



5-S40-214GD 19A
(shown in photo)

MOUNTING

Rubber bushing expands inside of tubing as 3/4" nut beneath lower raceway is turned with wrench. Plastic bushing on bottom of stem provides stability for stem inside of tubing for tight, permanent fit.

See chart at right for adapter sizes and matching tube sizes. To order, add adapter number to end of model number (example: 5-S40-214GD 19A).

Threaded stem size (less adapter): 1/2" diameter x 2- 3/4" long.

Adapter Number	Tubing I.D. (inches)
9	3/4"
11*	7/8"
13	1"
15	1-1/8"
17 B	1-3/16"
19 C	1-3/8"
19 A*	1-1/2"
21	1-7/8"

* Features stainless steel stem, washer and knurled nut. All other adapters feature zinc plated washer and knurled nut.

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Expanding Adapter Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)				
4	1 1/4	ADVANTAGE TPR / ROUND	DELRIN	250	4-S40-314GD	2-1/4	4 15/16	3 1/2				
		ADVANTAGE TPR / FLAT	DELRIN	300	4-S40-314GF	2-1/4						
		POLYOLEFIN	SS SLEEVE	300	4-S40-513	2-1/4						
		POLYLOC / GREY	DELRIN	300	4-S40-314G	2-1/4						
		ADVANTAGE HEAT FLAT ¹	SS BALL	300	4-S40-213RTF	2-1/4						
		ADVANTAGE HEALTH	SS BALL	300	4-S40-213MF	2-1/4						
		PHENOLIC	SS SLEEVE	300	4-S40-121	2-1/4						
	1 1/2	HI-TEMP RESIN	PLAIN	300	4-S40-521HT	2-1/4						
		5	1 1/4	ADVANTAGE TPR / ROUND ²	SS BALL	250			5-S40-213GD	2-3/4	6	4
				POLYOLEFIN	SS SLEEVE	300			5-S40-513	2-3/4		
WELDED DISC / POLYURETHANE	SS SLEEVE			300	5-S40-113P	2-3/4						
POLYLOC / GREY ²	SS BALL			300	5-S40-213G	2-3/4						
ADVANTAGE HEAT FLAT ¹	SS BALL			300	5-S40-213RTF	2-3/4						
ADVANTAGE HEALTH	SS BALL			300	5-S40-213MF	2-3/4						
ADVANTAGE TPR / FLAT	DELRIN			325	5-S40-314GF	2-3/4						
1 1/2	PHENOLIC		SS SLEEVE	300	5-S40-121	2-3/4						
	HI-TEMP RESIN	PLAIN	325	5-S40-521NHT	2-3/4							
6	1 1/4	ADVANTAGE TPR / ROUND	DELRIN	300	6-S40-314GD	3-1/4	7 1/16	4 1/2				
		POLYOLEFIN	SS SLEEVE	300	6-S40-521	3-1/4						
		POLYLOC / GREY ¹	SS BALL	300	6-S40-213G	3-1/4						
		ADVANTAGE HEAT FLAT	SS BALL	325	6-S40-213RTF	3-1/4						
		ADVANTAGE HEALTH	SS BALL	325	6-S40-213MF	3-1/4						
	1 1/2	PHENOLIC	SS SLEEVE	300	6-S40-121	3-1/4						

¹Delrin bearing also available, consult factory. ²Advantage Heat Round treads also available, change RTR to RTF.

S81 Series

Stainless Steel Top Plate

Capacity to 1,250 pounds each

Polished grade 304 stainless steel designed to prevent rust and corrosion in the most demanding wet, damp and corrosive environments. Stainless steel is impervious to repeated washings, thereby reducing maintenance and providing longer caster life. All component metal parts including ball bearings, axle, nut, and spanner bushing are stainless steel.

FEATURES

- ✓ **Finish:** Stainless steel
- ✓ **Design:** Stainless steel top plate and fork legs, case hardened for strength.
- ✓ **Swivel Construction:** stainless steel grade 440 ball bearings with hardened double raceway construction. Bearings are magnetic.
- ✓ **Axle:** 1/2" diameter stainless steel bolt with lock nut with zerk in raceway.
- ✓ **King Pin:** 5/8" stainless steel rivet, hydraulically upset.
- ✓ **Fork Leg Spacing:** 2-1/2"
- ✓ **Grease Temperature Range:** -45°F to +260°F

CASTER OPTIONS

- ✓ **VertiLoc® Brake:** stainless steel construction; to order, add "VL" to end of model number. 
- ✓ **Swivel Lock / Bolt-On:** Field installable 4- position stainless steel swivel lock. 
- To order specify swivel lock number **3091-17**. See page 92 for details.
- ✓ **Stainless Steel Roller Bearing:** to order, add "SRB" to end of model number (Example: 6-S81-320GF SRB).
- ✓ **Swivel Grease Seal:** To order, add "GS" to end of model number. 
- ✓ **Thread Guards:** See page 94 for thread guard availability.



6-S82-531
(shown in photo)

6-S81-320GF
(shown in photo)

MOUNTING

Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
4" x 4 -1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Caster Model Number	Rigid Caster Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
5	2	ADVANTAGE TPR / FLAT	DELRLIN	375	5-S81-320GF	5-S82-320GF	5-1/2	6 1/2	4 5/16
		ADVANTAGE HEALTH	ROLLER	375	5-S81-220MF	5-S82-220MF	5-1/2		
		POLYOLEFIN	PLAIN	650	5-S81-531	5-S82-531	5-1/2		
		POLYLOC / BLUE	DELRLIN	700	5-S81-320P	5-S82-320P	5-1/2		
		MOLDON POLYURETHANE / ALUM. CORE	DELRLIN	900	5-S81-721	5-S82-721	5-1/2		
		SOLID ELASTOMER	DELRLIN	1,000	5-S81-761	5-S82-761	5-1/2		
		PHENOLIC	PLAIN	1,000	5-S81-122	5-S82-122	5-1/2		
		TRITON	ROLLER	1,250	6-S81-535T RB	6-S82-535T RB	6-1/2		
6	2	ADVANTAGE TPR / ROUND	DELRLIN	450	6-S81-320GD	6-S82-320GD	6-1/2	7-1/2	5-1/16
		ADVANTAGE TPR / FLAT	DELRLIN	600	6-S81-320GF	6-S82-320GF	6-1/2		
		ADVANTAGE HEALTH	ROLLER	375	6-S81-220MF	6-S82-220MF	6-1/2		
		POLYOLEFIN	PLAIN	700	6-S81-531	6-S82-531	6-1/2		
		POLYLOC / BLUE	DELRLIN	800	6-S81-320P	6-S82-320P	6-1/2		
		MOLDON POLYURETHANE / ALUM. CORE	DELRLIN	900	6-S81-721	6-S82-721	6-1/2		
		SOLID ELASTOMER	DELRLIN	1,100	6-S81-761	6-S82-761	6-1/2		
		PHENOLIC	PLAIN	1,200	6-S81-122	6-S82-122	6-1/2		
		TRITON	ROLLER	1,250	6-S81-535T RB	6-S82-535T RB	6-1/2		
		8	2	ADVANTAGE TPR / ROUND	DELRLIN	450	8-S81-320GD		
ADVANTAGE TPR / FLAT	DELRLIN			675	8-S81-320GF	8-S82-320GF	8		
ADVANTAGE HEALTH	DELRLIN			675	8-S81-220MF	8-S82-220MF	8		
POLYOLEFIN	PLAIN			900	8-S81-531	8-S82-531	8		
POLYLOC / BLUE	DELRLIN			1,000	8-S81-320P	8-S82-320P	8		
SOLID ELASTOMER	DELRLIN			1,200	8-S81-761	8-S82-761	8		
MOLDON POLYURETHANE / ALUM. CORE	DELRLIN			1,200	8-S81-721	8-S82-721	8		
PHENOLIC	PLAIN			1,250	8-S81-122	8-S82-122	8		
TRITON	ROLLER			1,250	8-S81-535T RB	8-S82-535T RB	8		

S81 STAINLESS SERIES

